

# RAW SEWAGE PUMP STATIONS




Single Pump

## DIMENSIONS

Single Pump

Dual Pumps

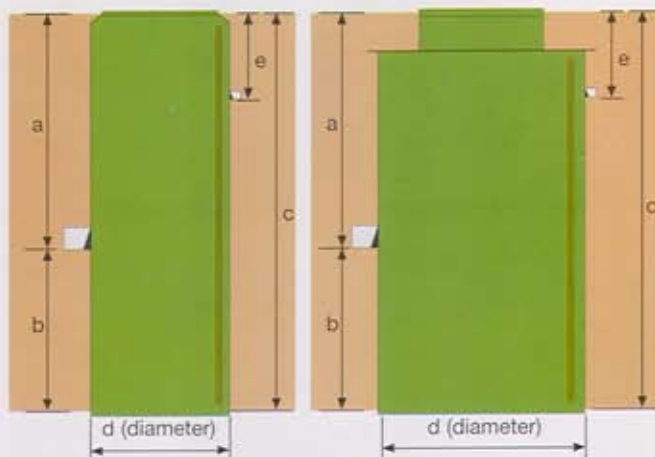

Model	a	b	c	d	e
Single or Dual Pumps					
Shallow	500	800	1300	600	350
Standard	1000	800	1800	600	350
Deep	1500	800	2300	600	350

### Dual Pumps

As above but 1000mm diameter

Non Standard Pump Stations and Pump Stations with 24 hour storage to comply with new **Building Regulation H1 Clause 2.39**, available on request.

## APPLICATIONS

This Pump Station is an alternative to the more sophisticated and expensive pump stations. The cost has been brought right down to suit the basic requirements. It is ideally suited for a single dwelling or small business with the option of selecting either a single or dual pump system.

## FEATURES

- High quality GRP construction.
- High level alarm included.
- Range of single phase Flygt, KSB or stainless steel Grundfos pumps.
- Various inlet inverts to suit your site requirements.
- Free design service and detailed specifications.
- Up to eleven metres pumping head.



Dual Pumps

**Allerton**

SPECIALISTS IN SEWAGE & EFFLUENT TREATMENT SYSTEMS

Woodbridge Road Sleaford Lincolnshire NG34 7EW  
 Tel: 01529 305757 Fax: 01529 414232  
 e-mail: sales@allertonuk.com  
<http://www.allertonuk.com>



Reg. No. 2002/236